

ASB - ANALOG SOUNDER BASE



Shown without sensor

Shown with sensor

STANDARD FEATURES

- Programmable evacuation codes - Continuous, March, ANSI Temporal patterns
- Base learns the sensor address and assumes an upper range address (128-254)
- Up to 127 sensors and 127 ASBs can be used on one SLC loop
- Can be alarmed or reset by zone or by individual address
- ASB SLC loop wire resistance = 50 ohms Max. (total SLC wire run length)
- High sound pressure level (85dB SPL at 10 feet)

SPECIFICATIONS	
Operating Voltage	17 - 41 VDC
SLC Loop Idle Current	110 μ A
SLC Loop Max. Alarm Current	110 μ A
Aux. Power Supply Voltage	16 - 31 VDC
Device Aux. Power Min. Voltage	15.0 VDC
Aux. Idle Current	550 μ A
Aux. Max. Alarm Current	18mA
Max. Humidity	93%RH (non-condensing)
Sound Pressure Level at 10 ft	85dB
UL Ambient Installation	
Temperature Range	32°F (0°C) ~ 100°F (38°C)
Operating Temperature Range	
	32°F (0°C) ~ 122°F (50°C)
Base Diameter	5.9"
Base Height (without sensor)	1.3"
Weight	0.455 lb
Compatible Sensors	ALG-V, ALK-V, ALK-V2, AIE-EA & ATG-EA

DESCRIPTION

The ASB Analog Sounder Base is designed for use with Hochiki analog style sensors models ALG-V, ALK-V, ALK-V2 AIE-EA, and ATG-EA. Each addressable base is to be connected to a Hochiki America Corporation DCP Signaling Line Circuit (SLC). The ASB provides an audible alarm in the immediate vicinity. Typical applications are use in hotels, apartments, and hospitals.

The ASB has a highly configurable programming algorithm that allows the user to setup groups of bases for synchronization of modulation tones. Each device has 16 states that are programmed with the desired output pattern to be used (e.g., "Temporal" or "March") for each state.

PRODUCT LISTINGS



S1383




California
State Fire
Marshal
7300-0410:161

Specifications subject to change without notice.

Continued on back.

WIRING DIAGRAM

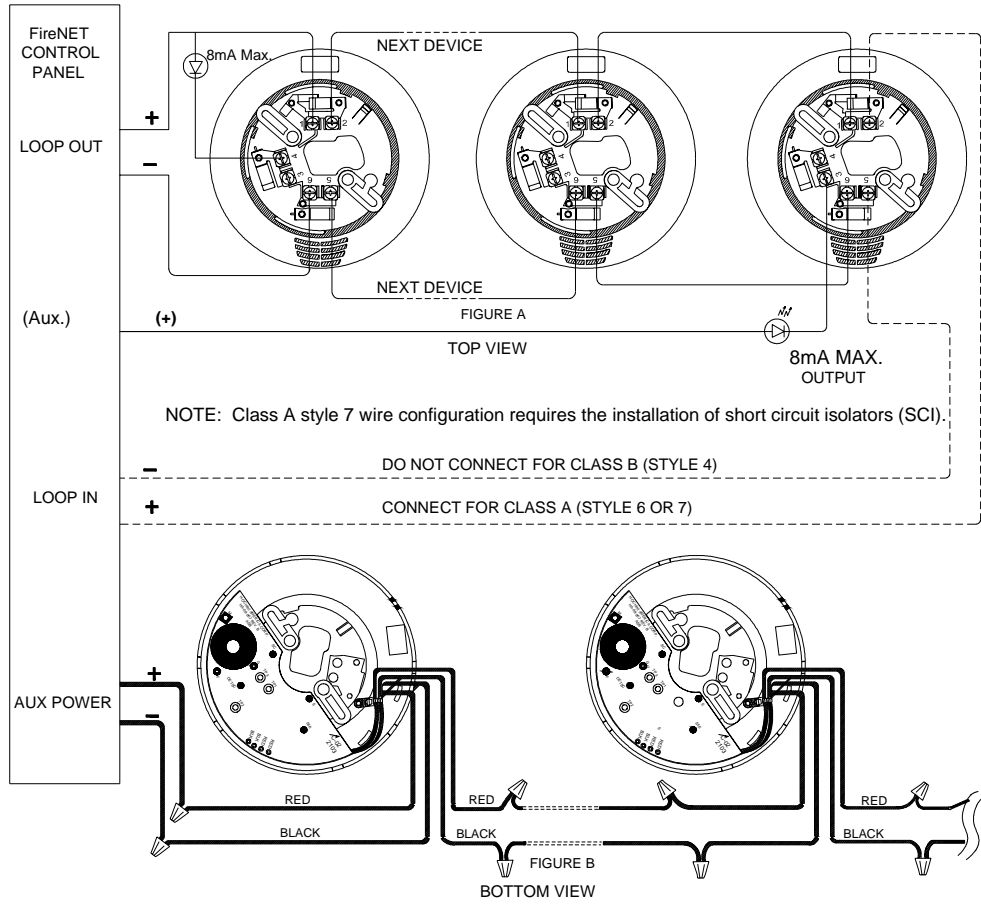

NUMBER OF BASES PERMITTED	
# of Bases In Alarm	Maximum Auxiliary 24VDC Power Wire Resistance (Total Auxiliary Run Length)
127	1.4 ohm
75	2.4 ohm
60	3.0 ohm
50	3.6 ohm
30	6.1 ohm
20	9.1 ohm
15	12.2 ohm
10	18.3 ohm

NOTE: SLC maximum wiring resistance is 50 ohms.